



Gas Oven Ranges 900mm wide

OG8002, OG8002/DD

- 7.5kW dual concentric burners for focused heat distribution from a fast boil to a low simmer
- Individual heavy-duty single cast iron supports, built to withstand the rigours of the busiest kitchen
- Low flue to allow use of the complete hob top
- 9.5kW oven
- Large capacity oven 4 x GN1/1
- Double insulated doors and side panels for safe operation, efficiency and economy



Hob Top Features

- 6 x 7.5kW dual-concentric burners
- Individual heavy-duty single cast iron pan supports with extended pan support fingers
- Flame failure protection
- Stainless steel spill trays
- Low flue to allow complete use of hob top

Oven features

- 9.5Kw burner
- Convenient piezo ignition
- Flame failure protection
- Precise thermostatic control from 120°C to 280 °C
- 180° side hinged doors
- Oven capacity 4 x GN1/1
- Heavy-duty easy remove wire chrome shelves
- 4 position racking with anti tilt guards and safety stops

Cleaning and Servicing

- Easy clean stainless steel external finish
- Removable stainless steel spill trays
- Heavy-duty easy remove wire chrome rack supports
- Stainless steel oven lining with removable base liner
- Access to all parts from the front and top of unit

Overall construction

- Permanent laser etched markings on fascia and knobs
- Fully framed 1.2mm steel chassis
- 1.2 mm stainless steel base panel
- 0.8 mm stainless steel side panels
- Castors as standard
- Sits flush to the wall, recess for services

Hob top construction

• 1.2 mm stainless steel welded bull nose and hob surround

Oven construction

- 0.8 mm stainless steel outer door skin
- Reinforced door seal
- Double insulated doors and side panels
- Stainless steel oven liner

Inclusive Accessories

• 2 chrome plated shelves



Available Options

Adjustable legs

• /N Natural or /P propane gas

• Drop down door option (OG8002/DD)


Available Accessories

OA8902 Splashback/shelf



Technical Data

	OG8002, OG8002DD
Width (mm)	900
Depth (mm)	800
Overall height (mm)	910
Hob height (mm)	900
Usable oven capacity H x W x D (mm)	405 x 710 x 525
Oven shelf size W x D (mm)	710 x 525
Hob	6 open burners
Heat input per hob burner (kW)	7.5 natural, 6.7 propane
Heat input oven burner (kW)	9.5 natural and 9.0 propane
Total heat input at full rate (kW)	54.5 natural, 49.2 propane
Total heat input at full rate (Btu per hour)	185,954 natural, 167,870 propane
Gas consumption at full rate Natural (m3 h-1)	5.19
Gas consumption at full rate Propane (kg h-1)	3.52
Gas pressure (mbar)	20 natural, 37 propane
Gas connection (BSP)	3/4"
Net weight (kg)	164
Packed weight (kg)	178
Shipping volume (m3)	1.2

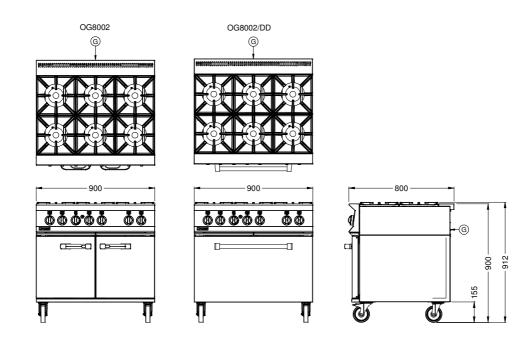

ncat

Lincat Limited, Whisby Road, Lincoln LN6 3QZ, United Kingdom.

UK Sales Tel: 01522 875500 🖀 UK General Tel: 01522 875555 **➡ Fax:** +44 (0)1522 875530

Sales e-mail: sales@lincat.co.uk 🖀 International Sales Tel: +44 1522 503250 🛛 💩 International Sales e-mail: export@lincat.co.uk

